


5-VSV-M 50

5-VSV-F 50


valve type with pilot valve


# coaxial valve

type **VSV-M 50**  
**VSV-F 50**

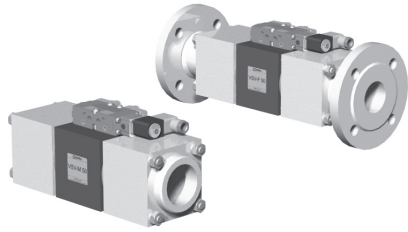

**2/2 way valve** externally controlled  
**pressure range** PN 0-40 bar  
**orifice** DN 50 mm  
**connection** thread/flange  
**function** valve normally closed symbol **NC**  
 valve normally open symbol **NO**



 Above stated body materials refer to the valve port connections that get in contact with the media only!

**design** pressure balanced, with spring return  
**body materials** ① ② steel, galvanized  
 ③ ⑤ without non-ferr. metals  
 ④ steel, nickel plated ⑥ stainless steel  
**valve seat** synthetic resin on metal  
**seal materials** NBR PTFE, FPM, CR, EPDM

**details needed for main valve**


- orifice
- port
- function NC/NO
- operating pressure
- flow rate
- media
- media temperature
- ambient temperature
- type of actuation


**details needed for pneumatic actuation**

- nominal voltage
- type of protection
- actuation pressure range min/max
- low wattage coil, actuation pressure range 4-7 bar
- pilot valve type

**details needed for hydraulic actuation**

- actuation pressure range min/max
- hydraulic control valve function

 The valves' technical design is based on media and application requirements. This can lead to deviations from the general specifications shown on the data sheet with regards to the design, sealing materials and characteristics.

 If order or application specifications are incomplete or imprecise there exists a risk of an incorrect technical design of the valve for the required application. As a consequence, the physical and / or chemical properties of the materials or seals used, may not be suitable for the intended application.

■ specifications not highlighted are standard  
 specifications highlighted in grey are optional

general specifications		options
<b>ports</b>	VSV-M threads G 2 VSV-F flanges PN 16/40	special threads special flanges
<b>function</b>	NC	NO
<b>pressure range</b>	bar 0-16/0-40	
<b>Kv value</b>	m <sup>3</sup> /h 43,0	
<b>vacuum</b>	leak rate < 10 <sup>-6</sup> mbar·l·s <sup>-1</sup>	
<b>pressure-vacuum</b>	P <sub>1</sub> ↔ P <sub>2</sub> pressure side max. 40 bar vacuum side leak rate < 10 <sup>-6</sup> mbar·l·s <sup>-1</sup>	
<b>back pressure</b>	P <sub>2</sub> > P <sub>1</sub> available (max. 16 bar)	
<b>media</b>	gaseous - liquid - highly viscous - gelatinous - pasty - contaminated	available (max. 16 bar)
<b>abrasive media</b>		version available
<b>damping</b>	opening by throttles on pilot valve	
<b>flow direction</b>	A ↔ B as marked	bi-directional upon request
<b>switching cycles</b>	1/min 100	
<b>switching time</b>	ms opening 150-3000 closing 150-3000	
<b>media temperature</b>	°C direct mounted pilot valve 60	remote mounted pilot valve outside temper-
<b>ambient temperature</b>	°C direct mounted pilot valve 50	ature range of media max.160°C
<b>flush ports</b>		available
<b>leak ports</b>		available
<b>limit switches</b>		inductive/mechanical upon request
<b>manual override</b>	via pilot valve	
<b>approvals</b>		LR/GL/WAZ
<b>mounting</b>		mounting brackets
<b>weight</b>	kg VSV-M 11,9 VSV-F 18,2	
<b>additional equipment</b>		upon request


electrical specifications		options
<b>nominal voltage</b>	U <sub>n</sub> DC 24V	special voltage upon request
<b>power consumption</b>	U <sub>n</sub> AC 230V 50 Hz 4,8 W	special voltage upon request
<b>protection</b>	DC 4,8 W	2,5 W
<b>energized duty rating</b>	AC pick up 11,0 VA holding 8,5 VA	
<b>connection</b>	IP 65 (P54) acc. DIN 40 050	
<b>additional equipment</b>	ED 100%	
<b>optional</b>	plug acc. DIN EN 175301-803 form B, 4 positions x 90° / wire diameter 6-8 mm	
<b>max. temperature</b>	illuminated plug with varistor	connector acc. VDMA
<b>explosion proof</b>	M12x1 connector acc. DESINA	
	media 60°C	
	ambient 50°C	
	EEx m II T5 nominal voltage U <sub>n</sub>	direct current 24 V 3,25 W
	power consumption	alternating current 230 V 50 Hz 2,90 W

pneumatic specifications		options
<b>actuation pressure range</b>	bar 4-10	
<b>air consumption</b>	cm <sup>3</sup> /stroke 55	
<b>cycle speed</b>	main valve speed variable by throttles on pilot valve	
<b>control</b>	preferably 5/2-way pilot valve	
<b>pilot valve interface</b>	co-ax / NAMUR	ISO 1
<b>actuator ports</b>	2/4 G 1/8	G 1/4

hydraulic specifications		options
<b>actuation pressure range</b>	bar 10-30 / 30-60	
<b>control</b>	preferably 4/2-way control valve	
<b>actuator ports</b>	X/Y G 1/4	NPT 1/4

# type VSV-M 50

function: **NC**  
closed when not energized

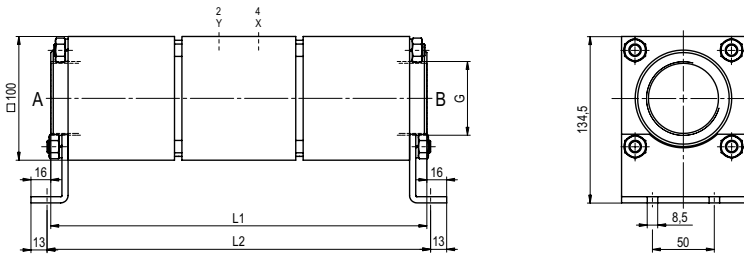


constructive length	L1	L2	L3
standard	304	310	404
with 1/2 inductive limit switches	330	336	430
with force-feed lubrication nipple	322	328	422
with mechanical limit switches	344	350	444


flanges PN	DIN	øD	øk	ød
16	2633	165	125	18
40	2635	165	125	18

# type VSV-F 50


function: **NO**  
open when not energized

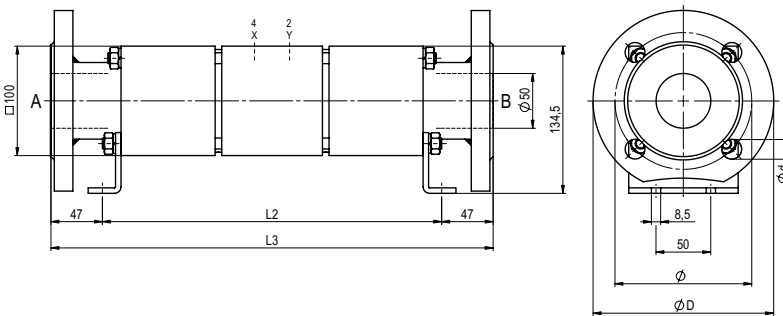

### pneumatic actuation (separately)



5/2-way-pilot valve  
flow rate 700 l/min  
pressure range 3-10 bar G 1/8



5/2-way-pilot valve ISO 1  
flow rate 700 l/min  
pressure range 3-10 bar G 1/4

The application-specific layout relating to temperature, pressure conditions, switching behavior, media and its consistency may restrict the range of use or necessitate relevant modifications to materials used and seal arrangements.

Rights reserved to make technical alterations • Not responsible for printing errors • Detailed drawings can be obtained upon request